


**CONNECTION**

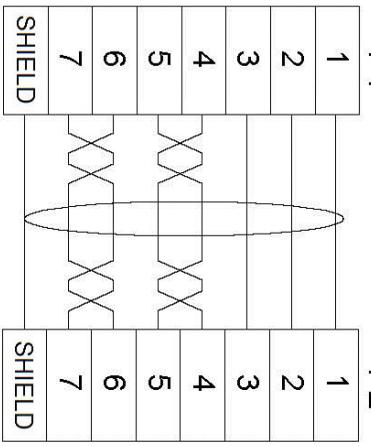

- NOTE:**
1. TERMINAL CRIMP RETENTION FORCE: 28AWG: 1.2kgf (11N) MIN.
  2. CABLE ASS'Y TEST (100%):  
 (1). OPEN, SHORT & MISS WIRE TEST  
 (2). Insulation Resistance: ≥10M OHM/300V DC 0.01SEC  
 (3). Conductance Resistance: ≤5 OHM
  3. RoHS COMPLIANT

ITEM	SPECIFICATION	UNIT	Q'TY
1	CABLE: UL20276 28AWG*2PR (ID=0.7mm) +28AWG*3C (ID=0.7mm)+DRAIN(28AWG)+AL/Foil; PVC JACKET; OD=4.0mm	MM	
2	HOUSING: JST 1.25mm Pitch 8P; P/N: GHR-08V-S	PCS	2
3	TERMINAL: JST P/N: SSHL-002T-P0.2	PCS	16
4	HEAT-SHRINK TUBE: Ø4.8; ADHESIVE; L=25mm*2PCS	MM	50
5	HEAT-SHRINK TUBE: Ø0.6; L=41mm*2PCS	MM	82

CRITICAL $\nabla$ =	MAJOR $\nabla$ =6	NEW RELEASE	Oct.14,2020	ECN NO.
UNITS: mm	GENERAL TOLERANCE	DESCRIPTION OF REVISIONS	DESIGNED	DATE
SCALE: X ±0.20 X' ±2'	X ±0.10 X' ±2'	CHECKED	TITLE	
DATE: Oct.14,2020	XX ±0.05 X' ±1'	APPROVED	EtherCAT-STO Cables Drive-to-Drive Cable	
SHEET: 1 / 1	MATL	FINISH	DWG. NO.	
CAD NO.		REV. A		



A B C D E F

1 2 3 4 5 6 7 8